



*** DANGER - CAUTION ***


Always Lower The Boat Lift Before Attempting Assembly.

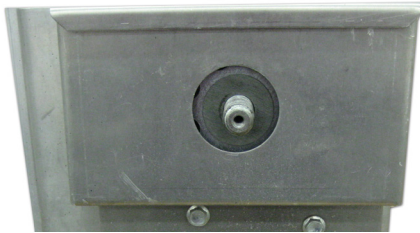


1. Lower Boat Lift.
2. Remove Wheel Nut and Wheel.

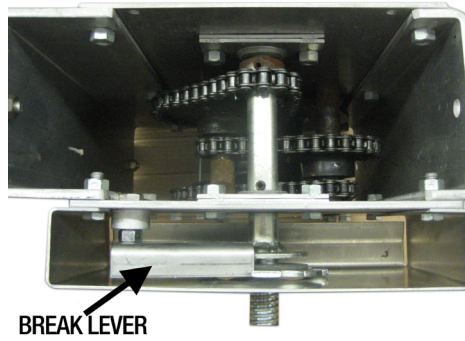

3. Remove Break Lever. You Will Not Use it Any Longer.

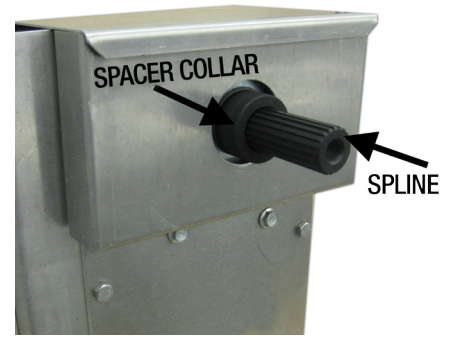


4. Install Spacer Collar and Spline.

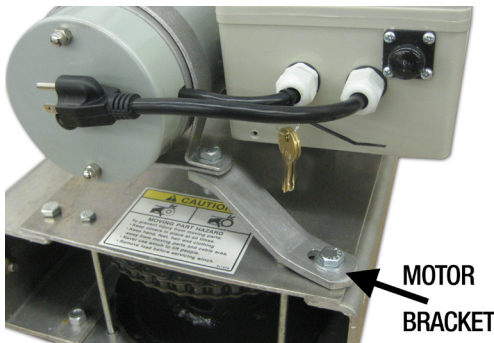

5. Mount Motor Bracket as Shown.



6. Install Motor Bolt and Washer. Tighten Motor Bolt to Approximately 70 Foot Pounds.

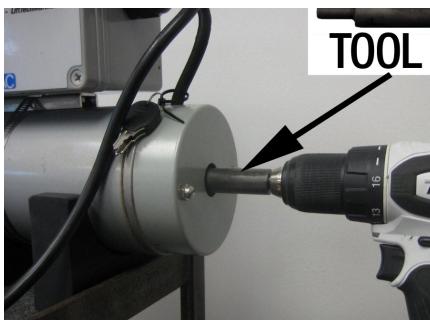

In Case of a Power Outage This Tool May be Inserted Into a Drill to Raise or Lower Your Lift. First Remove Rubber Cap From the Motor Shaft.

Plug in & Enjoy!

Recommended Extension Cords up to 150 feet 12/3.

Any Question Regarding Electrical Current Requirements Please Call Your Authorized Dealer or Lift Tech Marine 1-866-319-8877. WWW.LIFTTECHMARINE.COM

*** DANGER - CAUTION ***

All Power Used on Your Dock or Lift Needs to be GFI Protected at the Shoreline.